


# Pneumatic Stool with Back

Congratulations on your purchase.

The following instructions will guide you through each step of assembly.

1. Verify all inventory parts as noted in the diagram.
2. Insert wheels into stool base. Seating them securely may take some force. Place stool base on the floor with wheels facing down.
3. **REMOVE AND DISCARD PROTECTIVE PLASTIC CAP FROM PNEUMATIC CYLINDER**
4. Place cylinder into the round opening of the stool base.
5. Remove and discard plastic attached to knob. Insert back rest bracket into the receiver on bottom of seat and tighten knob.
6. Unscrew the knob from the rear of the back rest, insert long end of metal bracket into receiver on the back of the back rest, replace and tighten knob.
7. Insert seat onto the top of the pneumatic cylinder. Carefully sit down on the seat until the cylinder locks in place.

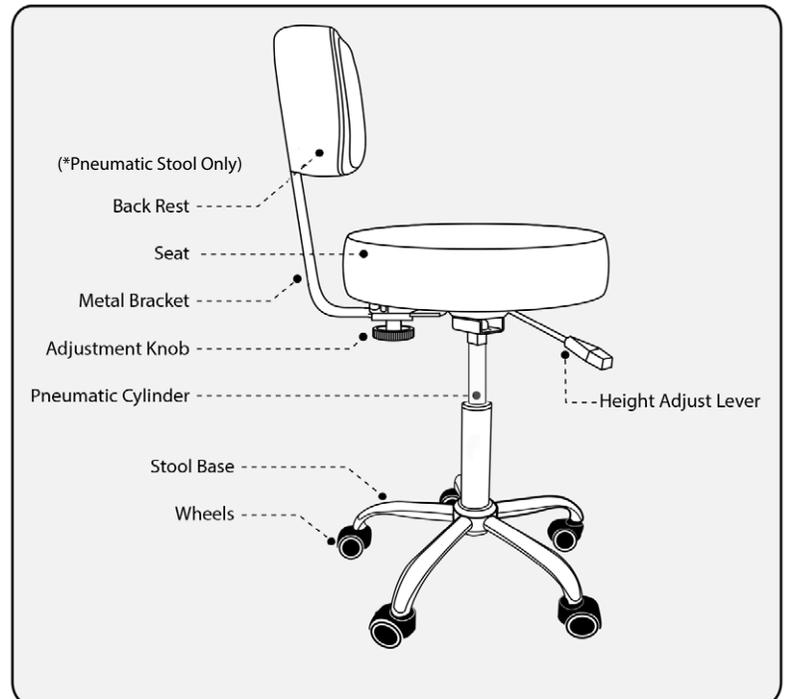

# Pneumatic Stool with Back

Congratulations on your purchase.

The following instructions will guide you through each step of assembly.

1. Verify all inventory parts as noted in the diagram.
2. Insert wheels into stool base. Seating them securely may take some force. Place stool base on the floor with wheels facing down.
3. **REMOVE AND DISCARD PROTECTIVE PLASTIC CAP FROM PNEUMATIC CYLINDER**
4. Place cylinder into the round opening of the stool base.
5. Remove and discard plastic attached to knob. Insert back rest bracket into the receiver on bottom of seat and tighten knob.
6. Unscrew the knob from the rear of the back rest, insert long end of metal bracket into receiver on the back of the back rest, replace and tighten knob.
7. Insert seat onto the top of the pneumatic cylinder. Carefully sit down on the seat until the cylinder locks in place.

